


Individual Lot Erosion and Sediment Control

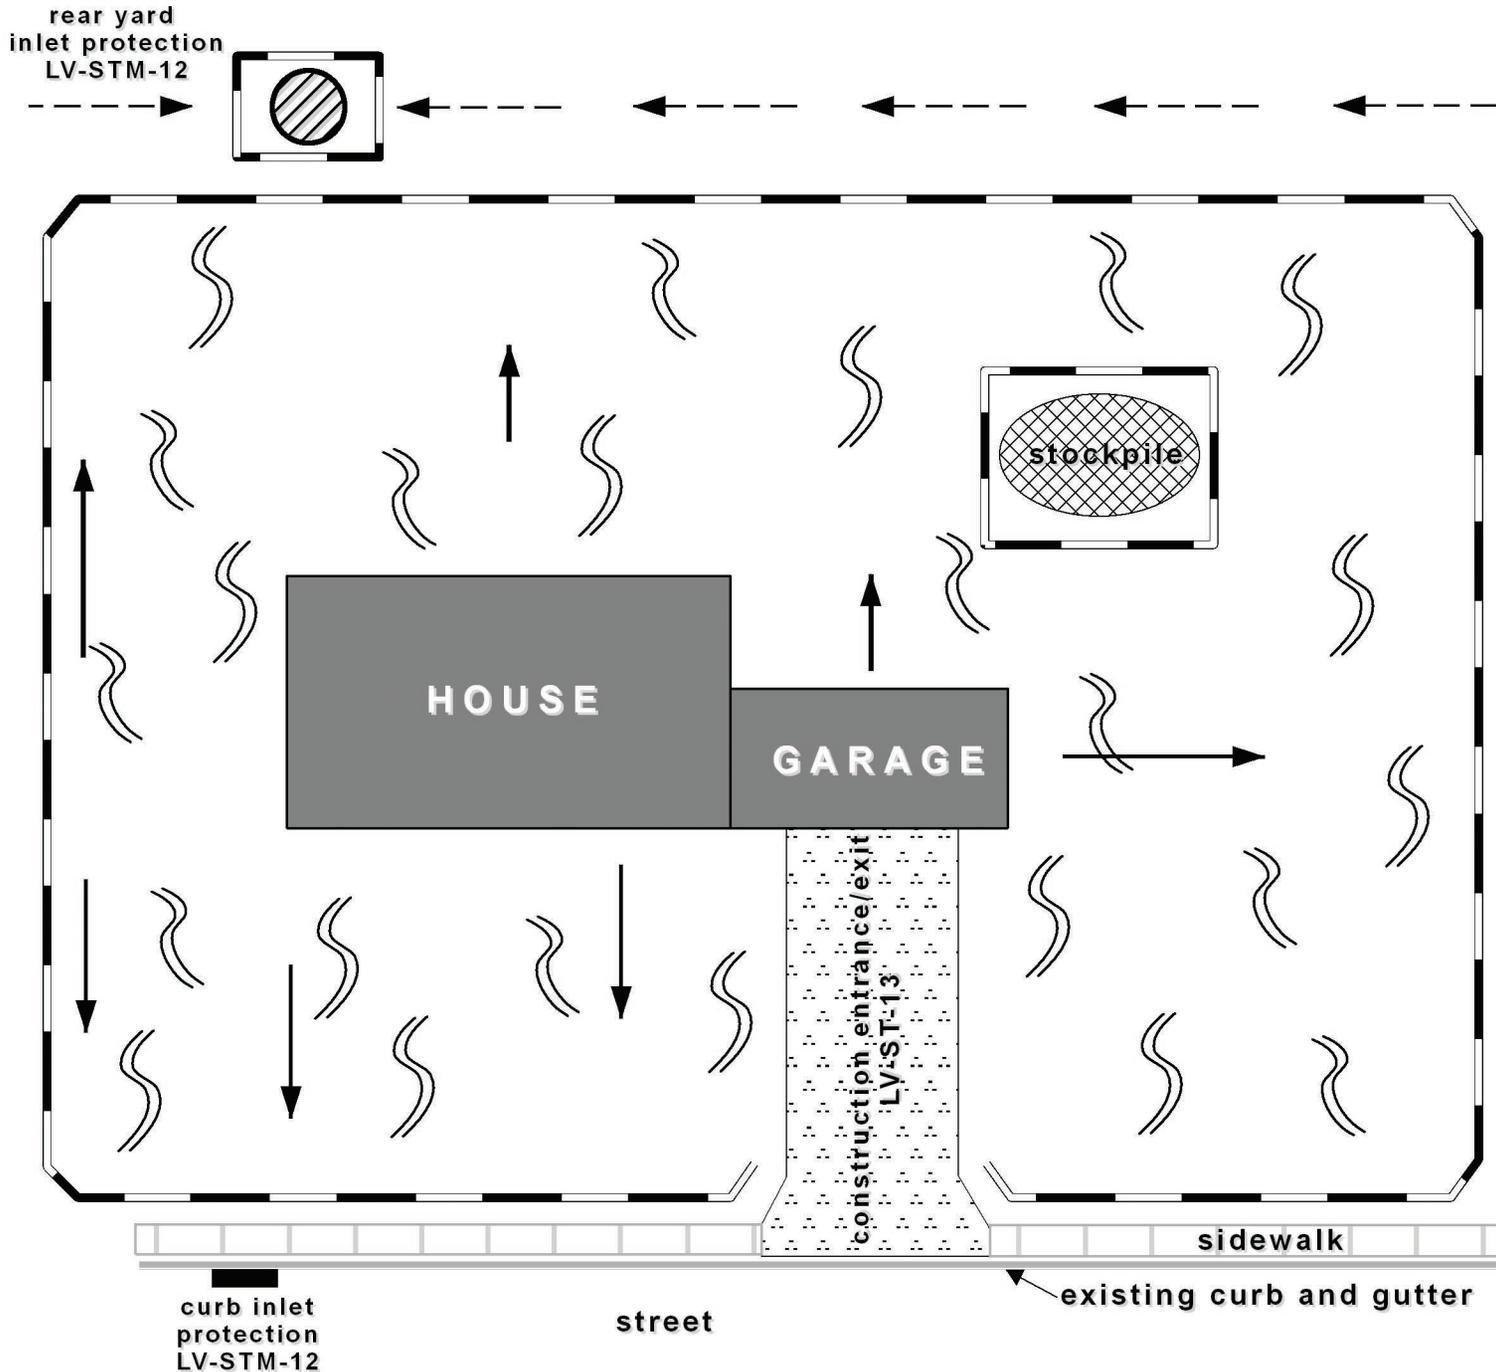

Erosion Control Legend

- ← - - - direction of drainage
- ← finished grade
- - - - silt fence
- ⊗ stockpile
- ~ temporary/permanent cover

- Notes**
1. It is the responsibility of the builder to comply with State laws and local ordinances regarding construction site erosion and sediment control.
 2. This plan is only a sample plan and is not intended to be all inclusive or address every situation, additional or modified practices may be required.
 3. Erosion and sediment control measures must be functional and maintained throughout construction.
 4. Maintain positive drainage away from the structure(s).
 5. Streets must be cleared of all debris at the end of each day.
 6. Temporary/permanent cover is required on all exposed soils throughout the building process.
 7. Stockpiles must not be placed near waterbodies or on streets or sidewalks.