


NOTE:
 3' RISERS WILL BE INSTALLED AT THE END OF SERVICES 9'-11' DEEP.
 5' RISERS FOR 12'-14'+ DEEP SERVICES UNLESS GROUND WATER IS ENCOUNTERED DURING EXCAVATION.
 ALL BENDS AND THE LAST TWO SECTIONS OF PIPE SHALL HAVE SOLVENT JOINTS.

PLAN

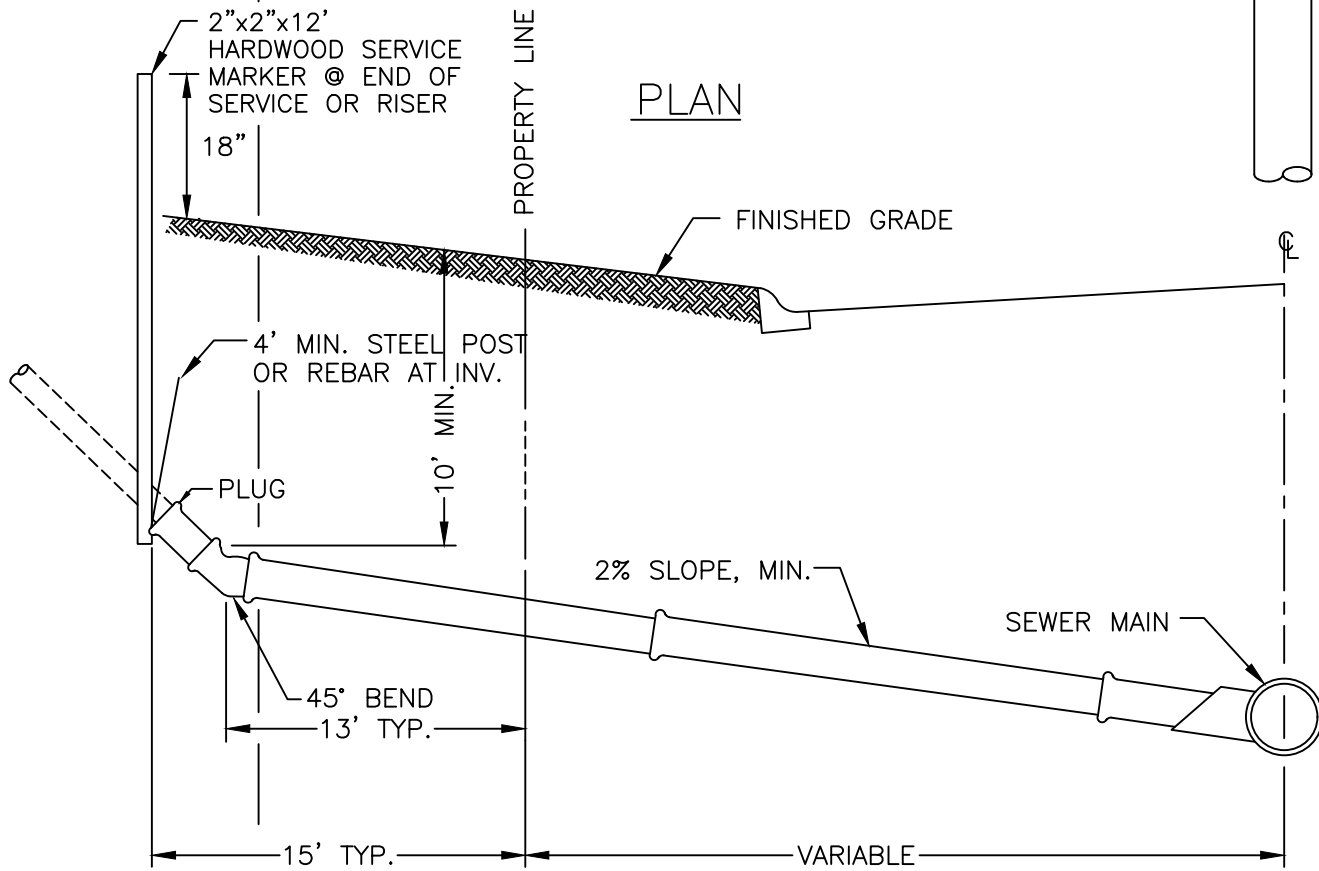

PROFILE

NOTE: SEE STANDARD PLATE LV-ST-13 FOR MnOPS REQUIREMENTS RELATED TO FUTURE LOCATING.



SANITARY SEWER
 TYPICAL HOUSE SERVICE
 (4" OR 6" DIAMETER SERVICE)

PLATE NO. LV-SS-6

DATE 01/2020